


	Parameter	Remarks	Symbol	Unit	TBW18		TBW30		TBW45	
Performance	Winding type				N	S	N	S	N	S
	Motortype, max voltage ph-ph				3-phase synchronous Iron core, 400V _{ac rms} (600V _{dc})					
	Ultimate Force @ 10°C/s increase	magnet @ 25°C	F _u	N	2700		4500		6750	
	Peak Force @ 6°C/s increase	magnet @ 25°C	F _p	N	2400		4000		6000	
	Continuous Force Watercooled*	coils @ 100°C	F _{cw}	N	1200		2000		3000	
	Continuous Force Aircooled*	coils @ 100°C	F _c	N	1140		1900		2850	
	Maximum Speed**	@ 560 V	v _{max}	m/s	3	6	2.5	6	2.5	6
	Motor Force Constant	mount. sfc. @ 20°C	K	N/A _{rms}	186	90	225	93	225	93
	Motor Constant	coils @ 25°C	S	N ² /W	2580		4300		6450	
Electrical	Ultimate Current	magnet @ 25°C	I _u	A _{rms}	19.6	41	27	65	41	98
	Peak Current	magnet @ 25°C	I _p	A _{rms}	15.0	31.1	20.7	50	31	75
	Continuous Current Watercooled*	coils @ 100°C	I _{cw}	A _{rms}	6.5	13.4	8.9	21.5	13.4	32.3
	Back EMF Phase-Phase _{peak}		B _{emf}	V/m/s	152	76	183	76	183	76
	Resistance per Phase*	coils @ 25°C ex. cable	R _{ph}	Ω	4.4	1.0	3.9	0.66	2.6	0.44
	Induction per Phase	I < 0.6 Ip	L _{ph}	mH	35	8	31	5	21	3
	Electrical Time Constant*	coils @ 25°C	τ _e	ms	8		8		8	
Thermal	Maximum Continuous Power Loss	all coils	P _c	W	726		1209		1804	
	Thermal Resistance	coils to mount. sfc.	R _{th}	°C/W	0.10		0.06		0.04	
	Thermal Time Constant*	up to 63% max. coiltemp.	τ _{th}	s	87		87		87	
	Watercooling Flow	for ΔT=3K	Φ _w	l/min	3.1		5.2		7.8	
	Watercooling Pressure-drop	order of magnitude	ΔP _w	bar	1.0		1.5		2.5	
	Temperature Cut-off / Sensor				PTC 1kΩ / KTY 83-122					
Mechanical	Coil Unit Weight	ex. cables	W	kg	7.3		12.3		18.2	
	Coil Unit Length	ex. cables	L	mm	344		580		852	
	Motor Attraction Force	rms @ 0 A	F _a	N	4900		8300		12450	
	Magnet Pitch NN		τ	mm	24		24		24	
	Cable Mass		m	kg/m	0.3			0.6		
	Cable Type (Power)	length 1 m	d	mm (AWG)	11.9 (14)			16.9 (10)		
Cable Type (Sensor)	length 1 m	d	mm (AWG)	4.3 (26)						

* These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool.

** Actual values depend on bus voltage. Please check the F/v diagram in our simulation tool.

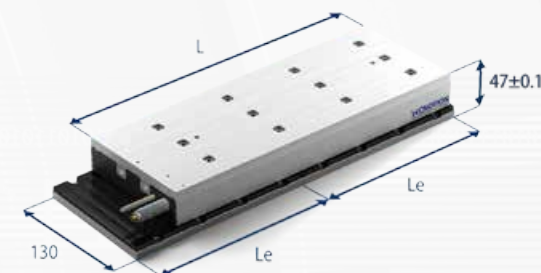

TBW18 on 2x192mm magnet plate shown

Approvals



See page 28 for Analog hall

Water cooling

All TBW motors feature integrated cooling channels that allow for the easy setup of a liquid cooled system, at no additional cost.

Magnet plate dimensions

Le (mm)	192	288
M5 bolts	8	12
Mass (kg/m)	10.5	

Magnet plates can be butted together.

All specifications ±10%

©2016 Tecnotion BV - All rights reserved - The contents of this document are subject to change without prior notice.